

Wireless LAN / Fast Ethernet IP Camera for Home / SOHO

Motion JPEG Compression



IC-1500
IC-1500Wg

✓ RoHS Compliant

Easy Setup

No need to worry about complex network setup procedures. The install wizard can provide easy setup procedure to use camera.

Simultaneous Viewing

This Internet Camera allows multiple users login to view live video simultaneously. The advanced video compression produces a high-quality, high-frame rate, VGA, CIF video stream.

Standard Image Format

The Internet Camera delivers complete, high-quality pictures in standard JPEG format, which can be viewed using any standard browser.


Support Windows-based and Web-based Monitoring Utility

These tools allow users to access the Internet Camera from a remote site via Intranet or Internet. They also provide users to make function configuration including image monitoring, recording images to a hard drive, viewing up to 4 cameras on one screen, snapshots and so on.

Supports DDNS & UPnP

The camera also supports UPnP and DDNS. DDNS allows the camera to use an easier to remember naming format rather than an IP address. UPnP will allow users of Windows XP and ME to access the camera with the click of a mouse without knowing IP address of the camera.

Internet IP Camera

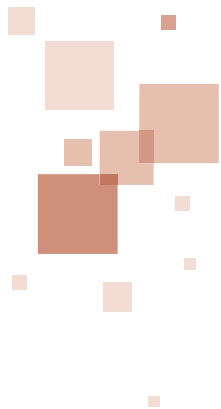

Taiwan / Headquarters

Edimax Technology Co., LTD.
TEL:886-2-7739-6888
FAX:886-2-7739-6887
sales@edimax.com.tw

Europe

Edimax Technology Europe B.V.
TEL:31-499-377344
FAX:31-499-372647
sales@edimax.nl

U.K.

Edimax Technology (UK) Ltd.
TEL:44-870-7740226
FAX:44-870-7740227
info@edimax.co.uk

Poland

Edimax Technology Europe
B.V. SP. Z O.O.
Tel: +48(22)-6079-480
Fax: +48(22)-6079-481
sales@edimax.nl

U.S.A.

Edimax Computer Company
TEL:1-408-496-1105
FAX:1-408-980-1530
sales@edimax.com

Latin America

TEL:1-786-845-8099
FAX:1-786-331-8490
sales_latina@edimax.com

China

TEL:8610-6213-9288
FAX:8610-6213-9231

Features

- Camera/Image
 - Motion-JPEG Image Video
 - Digital 24-bit Color
 - Provides Manual Focus Lens
 - Supports Up to 30 fps Video Frame Rate
 - Recording Format - Video (AVI), Snapshot (JPEG)
 - High Speed Hardware-Based Image Compression
- HTTP/Utility
 - Includes easy-to-use Viewer & Recorder utility
 - Provide Admin utility, Camera Viewer & WEB
- Management
 - View multiple cameras simultaneously - Up to 4 at a time
 - Supports four additional user accounts for viewing camera
 - Manual/Schedule/Cycle Record, Video
- Playback/Forward/Pause/Stop
 - Auto sending Snapshot by E-mail
 - LED light on/off adjustable.
 - Supports Windows 98SE/ME/NT/2000/XP/2003
 - Firmware Upgradeable
- Wireless Function (for IC-1500Wg only)
 - Enable/Disable Wireless LAN connection.
 - Support 64/128-bit data encryption function.

Specification

Model	IC-1500Wg	IC-1500
CPU+DSP	RTL8650B + Topro6811	RTL8651B + Topro6811
Flash	2 MB Flash	
RAM	8 MB SDRAM	
Image Sensor	Micron MI-360 300,000 Pixels CMOS Sensor	
Lens	Manual Focus, F=1.8	
LAN Port	10/100M UTP Port x 1	
Antenna	4dBi Antenna	N/A
Output Power	16dBm-18dBm	N/A
Power	12VDC, 1A	
Dimension	43mm x 130mm x 105mm	
Temperature	0~45°C	
Humidity	10~90% (Non-Condensing)	
Certification	FCC, CE, C-Tick, VCCI	