



Surveillance VLAN 12-Port Gigabit PoE+ Long Range Web Smart Switch with 2 Gigabit SFP Ports

GS-5210PL

FEATURES

- 8 Gigabit Ethernet PoE+ ports and 2 Gigabit RJ45 plus 2 Gigabit SFP ports
- One-click to create Surveillance VLAN and auto-discover, auto-enrolled devices at once
- 4-digit LED display instantly showing PoE power budget available and power consumption per port
- PoE powered devices (PD) alive check to enhance the reliability of the network
- Dual-firmware image for robust failover mechanisms
- Guaranteed PoE long distance to 200 meters
- Power backfeed protection to avoid damaging the PoE ports
- IP Surveillance VLAN and Voice VLAN to enhance video and voice quality
- DHCP snooping to protect the integrity of the legitimate DHCP server and its operations
- IEEE 802.3af/at PoE compliant, up to 30W per port (total power budget: 110W) for powering PoE-enabled devices
- Supports SNMP v1/v2c/v3, Access Control List (ACL), QoS, 802.1Q VLAN, IPv4/IPv6, Port Trunking, Port Mirroring, IGMP v1/v2/v3 Snooping and etc.
- Supports 24Gbps backplane bandwidth, 17.8Mpps forwarding rate, 8K MAC address table and 9KB jumbo frame

OVERVIEW

The EDIMAX Pro GS-5210PL is a web-smart switch optimized for small-to-medium businesses and enterprise networks. It features 10 Gigabit PoE+ ports, 4 SFP ports for Gigabit fiber uplinks, and long-range copper or optical connections for maximum network performance. The Gigabit connectivity fully utilizes the power of your office networking for demanding tasks, such as data backup, video conferencing, IP surveillance, high volume transaction processing, large file transferring, and more.

Designed for IP surveillance networks, this switch offers easy device discovery and user authentication through the one-click VLAN setting and Auto-Enrollment. The dedicated 4-digit LED display shows the PoE power budget available and power consumption per port. The switch also offers guaranteed power and data transmission speed of 10Mbps over 200 meters, making it ideal for remote network devices and IP cameras.

With advanced layer 2 management features such as SNMP v1/v2c/v3, Dual Firmware, Access Control List (ACL), DHCP Snooping, QoS, CoS, STP, 802.1Q VLAN, IPv4/IPv6, Port Trunking, IGMP v1/v2/v3 Snooping and Port Mirroring, this switch ensures reliable, secure, and scalable network performance for your business. The user-friendly web-based management interface allows for easy and fast network configuration.

Quick Installation of Surveillance Devices

The GS-5210PL offers feature-rich IP Surveillance VLAN to prioritize IP video traffic with ease, which also supports network cameras and network video recorders (NVRs). These functions provide IP surveillance installers easy setup, quick discovery, configuration, and product control on the network. Just plug-and-play, the One-click VLAN setting with Auto-Discovery, Auto-Enrollment makes the surveillance networks configuration with ease of mind.

4-digit LED Display Knowing Instant PoE Supply Status

In addition to a web-based GUI to keep track of port PoE power, the GS-5210PL features an intuitive 4-digit LED display showing its power consumption. System integrators can check the PoE power budget status including power consumption per port, and available power. All with a single hardware select button.

Cost-effective PoE Solution with PD Alive Check

The GS-5210PL switch offer high-speed network connection and power supply to Powered Devices (PDs). The PoE Powered Device Alive Check feature monitors real-time status of connected PDs by ping action (sending alive-checking packets). If a PD fails to respond, the GS-5210PL PoE+ Switch will reboot the PD, which enhances network reliability and reduces administration workload.

Stable and Reliable Network with Dual Firmware

The dual firmware feature allows switches to have two firmware stored. You can set up and implement an active and a backup firmware. If the current firmware faces problems, you can activate the backup firmware right away to reduce downtime.

Guaranteed 200 Meters with the Long Range Mode

While general Ethernet switches have a distance restriction of 100 meters, the GS-5210PL long-range mode provides extended power and data delivery distance to 200 meters (656 ft.) at 10Mbps full-duplex operation on a per-port basis. It's ideal for long-distance applications such as IP cameras, VoIP phones, access points, and PoE-enabled IoT devices at remote locations.


Safety Guard Your Devices with the Power Backfeed Protection

The GS-5210PL supplies up to 30W of electricity per port and has a total power supply of 110W to power any 802.3at or 802.3af compliant PoE/PoE+ device. With built-in PoE detection capability, the GS-5210PL is able to verify whether the connected device is IEEE802.3at or IEEE802.3af compliant. Moreover, with the power backfeed protection, the GS-5210PL can avoid damaging the PoE ports.

Intuitive and Powerful Smart Layer 2 Management

The GS-5210PL is designed for small-and-medium business (SMB) and enterprise networks that require smart layer 2 network management. This web smart switch meets the network growing need by providing advanced essential features such as SNMP v1/v2c/v3, Access Control List (ACL), QoS, CoS, STP, 802.1Q VLAN, Link Aggregation, Broadcast Storm Control, Loop Detection/Prevention, IPv4/IPv6, Port Trunking, Port Mirroring and more. Further optimizing the performance of business networks. Experience fast and easy operations with just a few simple clicks through the user-friendly web-based management utility, your network is ready to use with ease.

APPLICATION DIAGRAM

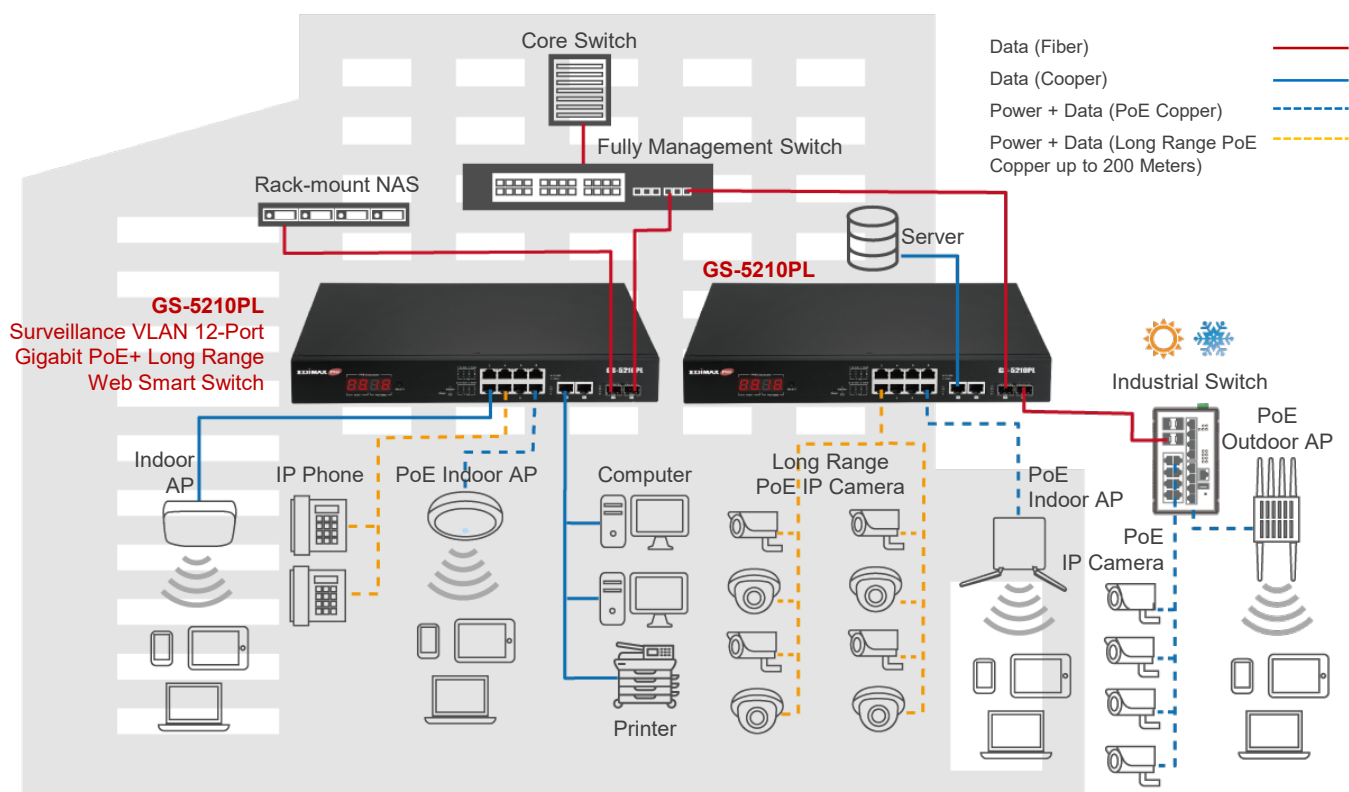

Surveillance VLAN 12-Port Gigabit PoE+ Long Range Web Smart Switch with 2 Gigabit SFP Ports

GS-5210PL

SPECIFICATIONS

HARDWARE

Ports	<ul style="list-style-type: none">8 x RJ45 10/100/1000Base-T Gigabit PoE ports2 x RJ45 10/100/1000Base-T Gigabit ports2 x SFP 1000Base-SX/LX Gigabit ports
Buttons	<ul style="list-style-type: none">Reset buttonSELECT button
LED Indicators	<ul style="list-style-type: none">PoE Alert: PoE Power Consumption AlertSYS ALM: System AlertPoE: PoE Status (1-8 port)Link/Act: Connection and Transmission Status (1-12 port)PWR Consumption: PoE Budget AvailablePORT: PoE port numberPoE Watts: Port Power Consumption
Power Input	100-240V AC, 50-60Hz, internal power supply
Total Power Budget	110W
Mounting	Desktop / Rack-mount (Rack-mount kit included)
Housing	Metal
Fan	Fanless
Dimensions	330 (W) x 230 (D) x 44 (H) mm (12.99 (W) x 9.06 (D) x 1.73 (H) inches)
Weight	2.3kg (5.07lb)

PERFORMANCE

Switching Capacity / Backplane	24Gbps
Forwarding Rates	Max. 17.8Mpps (64-byte package size)
MAC Address Table	8K
Jumbo Frame	9KB
Packet Buffer	4.1Mb

POWER OVER ETHERNET

Standard	IEEE 802.3af (PoE), IEEE 802.3at (PoE+)
Power Output	Up to 30W per port
Pin Assignment	1/2(+), 3/6(-) End-Span (mode A)
Management	PoE status, PoE scheduling, PoE priority, PoE on/off, PoE PD alive check
PoE Long Range	Guaranteed PoE long range to 200 meters at 10Mbps
Power Backfeed Protection	Built-in

OTHERS

Standard	<ul style="list-style-type: none">IEEE 802.3 10Base-T EthernetIEEE 802.3u 100Base-TX Fast EthernetIEEE 802.3ab 1000Base-T Gigabit EthernetIEEE 802.3z 1000Base-SX/LX Gigabit Ethernet over fiberIEEE 802.3af Power over Ethernet (PoE)IEEE 802.3at Power over Ethernet (PoE+)IEEE 802.3x Full-duplex and flow controlIEEE 802.1p Quality of Service (QoS)IEEE 802.1x Port-based Network Access Control (PNAC)IEEE 802.1Q Virtual LANs VLANsIEEE 802.1d Spanning Tree Protocol (STP)IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)IEEE 802.1AB Link Layer Discovery Protocol (LLDP), LLDP-MED (Media Endpoint Discovery)IEEE 802.3ad Link Aggregation Control Protocol (LACP)IEEE 802.3az Energy Efficient Ethernet
Environmental Condition	Temperature: <ul style="list-style-type: none">Operating: 0~40°C (32~104°F)Storage: -40~70°C (-40~158°F) Humidity: <ul style="list-style-type: none">Operating: 10~90% (NonCondensing)Storage: 10~90% (NonCondensing)
Certifications	FCC, CE, BSMI

SMART FEATURES

Quality of Service (QoS)	<ul style="list-style-type: none">Rate limiting on packets sent and received by an interface8 queues on each portWRR, SP, WRR+SP queue scheduling algorithmsRe-marking of the 802.1p priority and DSCP priorityRate limiting in each queue and traffic shaping on ports
Class of Service (CoS)	<ul style="list-style-type: none">IEEE 802.1p class of service (SPQ, WRR)Port-based CoSIP TOS precedence802.1p VLAN Information based CoSDSCP based CoSTCP/UDP Based CoS
Spanning Tree	<ul style="list-style-type: none">IEEE 802.1d Spanning Tree Protocol (STP)IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
VLAN	<ul style="list-style-type: none">Up to 256 VLANs and 4096 VLAN IDs802.1Q tag-based VLANPort-based VLANSurveillance VLANVoice VLANMAC VLANGVRP
IPv6	<ul style="list-style-type: none">IPv6 over Ethernet (RFC 2464)Dual-stack (RFC 4213)ICMPv6 (RFC 4884)Neighbor discovery (RFC 4861)Auto configurationStatic IPv6 address and prefix lengthStatic IPv6 default gatewayIPv6 duplicate address detection
Port Trunking	<ul style="list-style-type: none">IEEE 802.3ad LACP Trunk-Static TrunkUp to 8 trunk groups
IGMP Snooping	<ul style="list-style-type: none">IGMP v1/v2/v3 snoopingBlock unknown multicast traffic
Port Mirroring	Port Mirroring Traffic Direction: <ul style="list-style-type: none">Both (Ingress and Egress)IngressEgress
Security	<ul style="list-style-type: none">RADIUSTACACS+AAAManagement AccessAuthentication ManagerPort SecurityProtected PortBroadcast Storm ControlDoSDynamic ARP InspectionDHCP SnoopingIP Source GuardBPDU GuardRemote Access: HTTPS/SSH/HTTP/Telnet/Session Timeout
Management	<ul style="list-style-type: none">User Interface: Web-based managementUser Account: Login account configurationFirmware Upgrade: Firmware upgrade by WEBSyslog: Support event log, alarm log and security logDual-firmware image for failover mechanismsACL (Access Control List)CLI (Command-Line Interface)User Account: Login account configurationSNMP v1/v2c/v3

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.

Copyright © 2023 Edimax Technology Co. Ltd. All rights reserved.

www.edimax.com 3